

Package Contents



NVR



MOUSE



POWER CABLE



KEYBOARD



RACK MOUNT EARS




TERMINAL BLOCK (FOR ALARMS)

Operating Information


SPEC	VALUE
Voltage	100V-240V, 6A, 50HZ-60HZ
Operating Environment	Indoor Equipment Only
Operating Temperature	32 -113° F / 0 - 45° C
Humidity	20~90% RH

Before You Begin

1. Connect all cameras to PoE Camera Switch with Cat5, Cat5e, or Cat6 networking cable. For the V250-8A16 Hybrid, 8 ports are available.
2. Connect all analog cameras. 16 channels are available.
3. Connect the Corporate LAN Port to your Site LAN.
4. Connect a monitor to either HDMI, DVI and / or VGA.
5. Connect your mouse and keyboard (included) to the rear PS/2 ports.
6. Connect power.
 - a. The V250 Hybrid will automatically power on and boot into a Wizard which will guide you through the configuration of your video recorder.

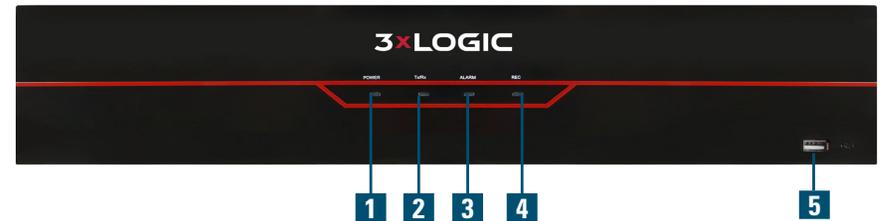

PART NAME		FUNCTION
1	POWER	Shows the Power On/Off Status
2	Tx/Rx	Blinks to indicate network usage
3	ALARM	Blinks to indicate the alarm I/O has been triggered
4	REC	Blinks to indicate data is being recorded to the HDD
5	USB	USB 2.0 port

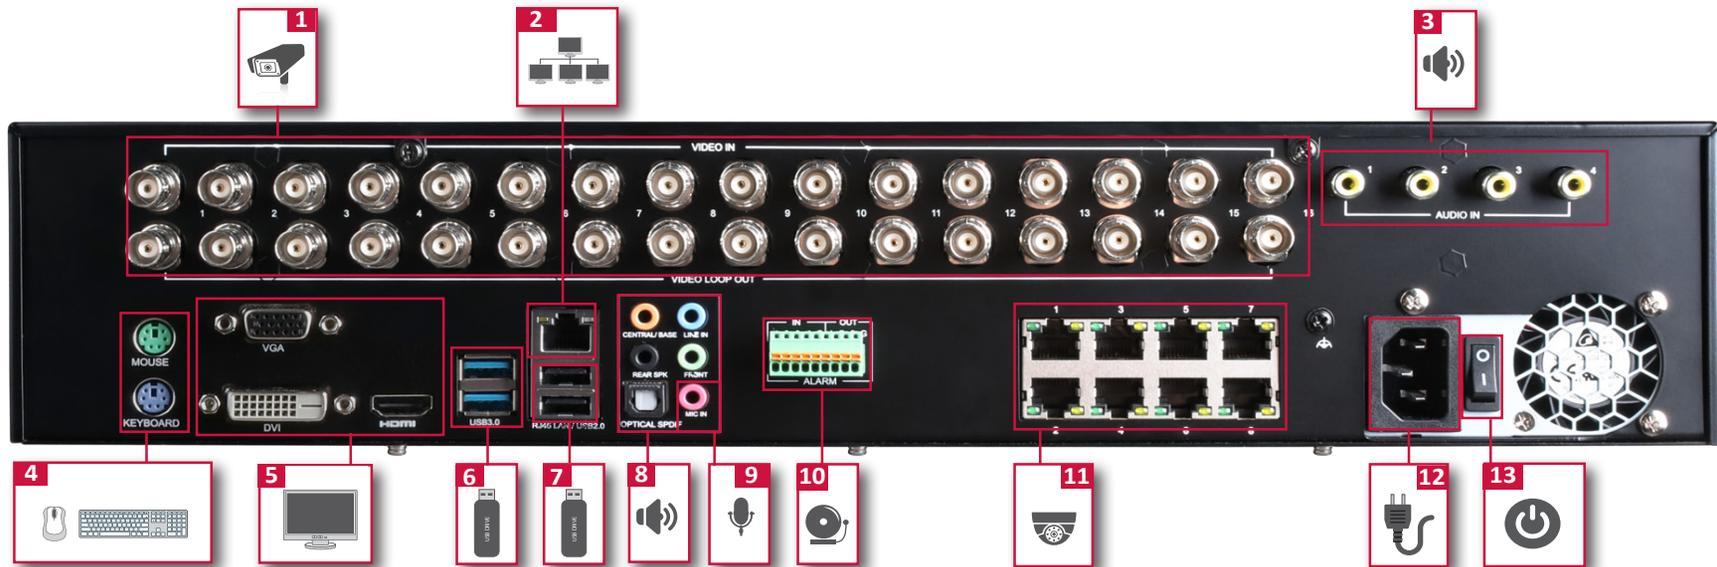

NOTE:

- A USB drive containing the 3xLOGIC Support Environment is connected within the chassis. To access the Support Environment, simply boot to the drive.
- The Support Environment allows for Windows images to be taken or applied as well as providing access to multiple diagnostic tools.



- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - This device may not cause harmful interference.
 - This device must accept any interference received, including interference that may cause undesired operation

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
- This Class A digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada
- This device is UL and ULC E467564 (Safety) certified.
- This device complies with CE - EMC Directive 2014/53/EU – Class A, ROHS Directive 2011/65/EU with Addendum 2015/863/EU, WEEE Regulation 2012/19/EU. Declaration of Conformity is available upon request.
- WEEE - Do not discard this product along with other household waste, it must be collected and treated separately.

PART NAME	FUNCTION
1 Analog Inputs	Connect Analog Cameras
2 Corporate LAN Port	Connect to Site LAN
3 RCA Jack In	Analog Audio In
4 2x PS/2 Ports	Connect Keyboard and Mouse
5 HDMI / VGA / DVI	Connect to Monitor
6 USB 3.0 x2	Connect External Storage for Export
7 USB 2.0 x2	Connect for External Peripherals
8 Audio Out (Stereo, Optical SPDIF)	Connect to Speakers
9 Mic In	Connect to Microphone
10 Alarm I/O	Connect to Terminal Block
11 8-Port Internal PoE Switch	Connect IP Cameras
12 Power Supply	Provide Power to the Appliance
13 Power On / Off Switch	Turn Appliance On / Off

www.3xlogic.com | helpdesk@3xlogic.com

