


VIGIL Central Management v12.0

VIGIL Central Management (VCM) provides the ability to monitor the status of VIGIL Servers and V-Series cameras. Designed with the integrator in mind, VCM allows you to proactively inform your end users of any potential health concerns with their VIGIL Servers or cameras.

Every integrator has had to have that awkward conversation: “We’re sorry, but we don’t have video of the incident because the camera has been down for a month.” With VCM, you will know when the status of a customer’s VIGIL Server or cameras change, allowing you to take immediate action to resolve any potential issues. Created to add value in any scenario, VCM can be deployed for a single, enterprise-level project or can manage thousands of single or multi-location end users on the same system. Introduced in VIGIL VCM 12.0 is Active Directory integration for both VCM and managed VIGIL Server users as well as custom folders for the Updates interface, Permissions and Server Site Search forms and several user and site managements improvements. VCM is hosted by 3xLOGIC in the cloud.

Contact us today for a product demonstration:

■ 1.877.3XLOGIC

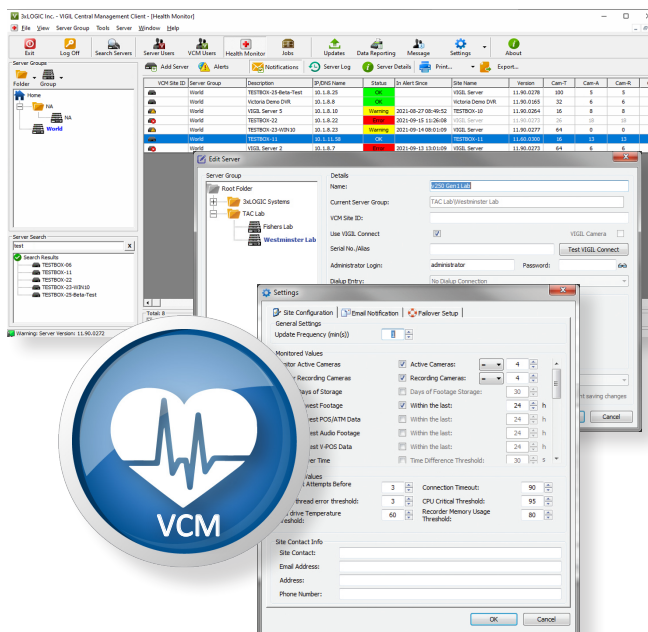

Features

- **Health Monitoring** - Monitor the health of your 3xLOGIC VIGIL appliances:
 - ▶ CPU Utilization
 - ▶ Number of Active OR Recording Cameras
 - ▶ Video footage data ranges
 - ▶ Storage capacity and days of video and audio storage
- **Remote Jobs** - Remotely deploy software updates and configuration changes with the ability to suspend and resume failed or stuck jobs
- **User Management** - Centrally control Server users and their permissions on any or all connected Servers
- **Manage VIGIL Client** - Dynamically populate VIGIL Client’s Server list
- **Server Health Alerts** - Receive warning notification on system health through VCM Client or via text/email
- **Thumbnails** - Pull camera snapshots to check field-of-view without logging into every Server and camera
- **Server Settings** - Backup and store Server configuration files
- **Active Directory Integration** - Manage VCM and VIGIL Server Users and User Groups using an Active Directory Server. Additionally, VCM can act as an Active Directory authentication proxy for any of its applicable VIGIL Servers.

Recommended Hardware Requirements			
Requirement	Network Size		
	Small (1-500 VIGIL Servers)	Mid-Range (500-1000 VIGIL Servers)	Enterprise (1000+ VIGIL Servers)
CPU:	Intel® Core™ i3 Processor	Intel® Core™ i5 Processor	Intel® Core™ i7 Processor
RAM:	4GB	8GB	16GB
HDD:	500GB SATA (Minimum 500MB required for install)	500GB SATA (Minimum 500MB required for install)	500GB SATA (Minimum 500MB required for install)
Database (Optional):	MSSQL2014 Express (or other SQL2014 variant)	MSSQL2014 Express (or other SQL2014 variant)	MSSQL2014 Express (or other SQL2014 variant)
OS:	Windows 7, 8.1, 10	Windows 7, 8.1, 10	Windows 7, 8.1, 10
Minimum System Requirements for VCM Client:			
CPU:	Intel® Core™ i3 Processor		
Part Numbers			
VGL-VCM-H	Hosted VCM		
VGL-VCM-B-MIN	Base Hosted VCM		